
ECOUSTIC® FOLIAR INSTALLATION + CARE



ECOUSTIC® FOLIAR INSTALLATION

ASSEMBLY INSTRUCTIONS

Supplied



5x Ecoustic® Foliar leaf tiles Sold in packs of 5 per color Flat packed separately

5x Ecoustic® Foliar base tiles Sold in packs of 5 per color Flat packed separately

Source



Flat-head c/sunk 1" (25mm) 10g [4-8 per tile]



Power drill

Essential



Clean hands Handle with care during installation



Spirit level

INSTALLATION

Step 1


Insert the screw into center of the base. Insert the remaining 3 screws

Step 2

Fix Ecoustic® Foliar leaf into the base. The leaf will self locate via magnet fasteners within the part.

Please Note


For secure fixing between the leaf and the base, silicone or builders glue can be applied to the three contact points on the rear of the leaf.



Tip:

If you wish for the bottom edge to be horizontal, use a spirit level to straighten the first base, then it is as easy as butting the next.

Ensure the following tile is firmly pushed up against the previous for a tight fit prior to screwing into place.

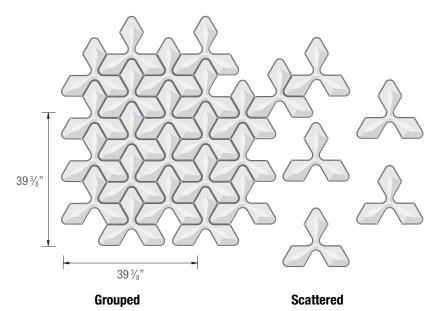



ECOUSTIC® FOLIAR CARE

Please Note

- Care must be taken when cleaning as these instructions apply to the fabric face only and the
 possible effect of the cleaning regime on underlying bases and wall surface must be considered.
- For these reasons it is suggested to spot clean only and that it may be carried out by a professional cleaner.

Regular Care

- Protect from direct heat and sunlight.
- To prevent dust build up, lightly dust with a soft cloth or vacuum with a soft brush attachment.

Cleaning

- Professional cleaning is always recommended.
- Always test any cleaning products on an inconspicuous area prior to commencing cleaning.
- Blot any excess spills from the material with a dry clean sponge or cloth.
- Treat all stains as soon as possible.
- Most marks can be spot cleaned by lightly wetting the affected area with a mild detergent and warm water solution.
- Do not saturate the tile.
- Do not scrub or abrade the tile surface as this will affect the surface finish.
- Once the stain or mark has been loosened, blot the excess solution out with a dry clean sponge or cloth.
- Sponge afterwards with clean warm water and dry any excess solution out with a dry clean sponge or cloth.
- The fabric may also be spot cleaned with dry cleaning fluid. Lightly sponge a small amount of dry cleaning fluid and blot .
- Dry away from direct heat or sunlight.
- Do not use carpet shampoo.

