

ECOUSTIC® TORQUE CEILING INSTALLATION + CARE




unika vaev
INSTYLE

Hear yourself think®

ECOUSTIC® TORQUE CEILING INSTALLATION


ASSEMBLY INSTRUCTIONS

Supplied




8x Ecoustic® Torque Ceiling Tiles
Sold in boxes of 8 per color
23 ¹³/₁₆" x 23 ¹³/₁₆"
or
47 ¹³/₁₆" x 23 ¹³/₁₆"

Source




Pre-existing or newly installed
drop-ceiling T-frame



Hold down clip (4 per tile)
Suitable for your grid system

Essential



Be sure to use clean hands and
handle with care during
installation

INSTALLATION

Step 1

Check the pre-existing or newly installed frame in which to suspend the Ecoustic® Torque Ceiling tile.

Ensure the frame has been correctly installed with a suitable sized aperture for the tiles and the frame is square and true.

Step 2



The return flange of the tile will locate onto the landing of the suspended ceiling frame. The tiles can be dropped in place from the rear of the frame or slotted through from the visible side.

Ensure not to bend the tile. The use of suitable Hold Down Clips is mandatory on Ecoustic® Torque Ceiling, 4 per tile.

Step 3

Continue to fill the frame with Ecoustic® Torque Ceiling.


Finish the installation in a discreet area as the last tile can remain unclipped to act as access to the plenum.

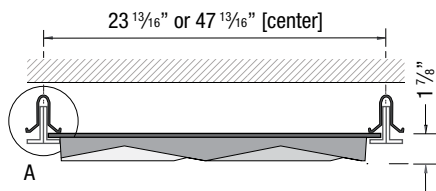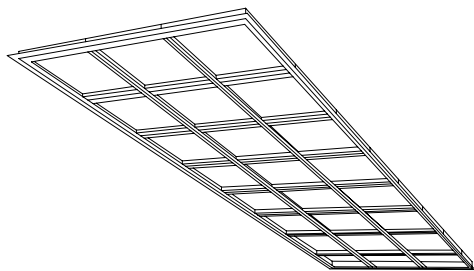

Hold Down Clip

T-Frame

Detail - A

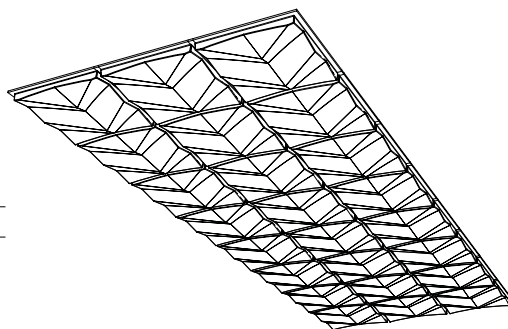

ECOUSTIC® TORQUE CEILING CARE

CARE INSTRUCTIONS

Please Note

- Care must be taken when cleaning as these instructions apply to the fabric face only and the possible effect of the cleaning regime on underlying bases and wall surface must be considered
- For these reasons it is suggested to spot clean only and that it be carried out by a professional cleaner.

Regular Care

- Protect from direct heat and sunlight
- To prevent dust build up, lightly dust with a soft cloth or vacuum with a soft brush attachment

Cleaning

- Professional cleaning is always recommended
- Always test any cleaning products on an inconspicuous area prior to commencing cleaning
- Blot any excess spills from the material with a dry clean sponge or cloth
- Treat all stains and spills as soon as possible
- Most marks can be spot cleaned by lightly wetting the affected area with a mild detergent and warm water solution
- Do not saturate the tile
- Do not scrub or abrade the tile surface as this will affect the surface finish
- Once the stain or mark has been loosened then blot the excess solution out with a dry clean sponge or cloth
- Sponge afterwards with clean warm water and dry any excess moisture with a dry clean sponge or cloth
- The product can also be spot cleaned with dry cleaning fluid, lightly sponge a small amount of dry cleaning fluid and blot
- Dry away from direct heat and sunlight
- Do not use carpet shampoo