

**ECOUSTIC® CEILING EDIT**



**unika vaev**  

---

**INSTYLE**

Hear yourself think®

# ECOUSTIC® CEILING EDIT COLOR


## .47" Options




ALMOND




ATOM



AZURE



CAVE



CIRRUS



COOL



DENIM



ECRU



FAWN



GALAXY



HORIZON




ISLE



OLIVE



OXIDE



SNOWDROP




TRUFFLE



TUNGSTEN


## .94" Options



Ash



Graphite



Nero



Pure



Stone

Product may vary in color due to the nature of the media  
Please refer to website for current color range


**ecoustic**® global leaders  
by INSTYLE in acoustic  
products

# ECOUSTIC® CEILING EDIT PROFILES


## Ceiling Edit - Angle




### FRONT VIEW

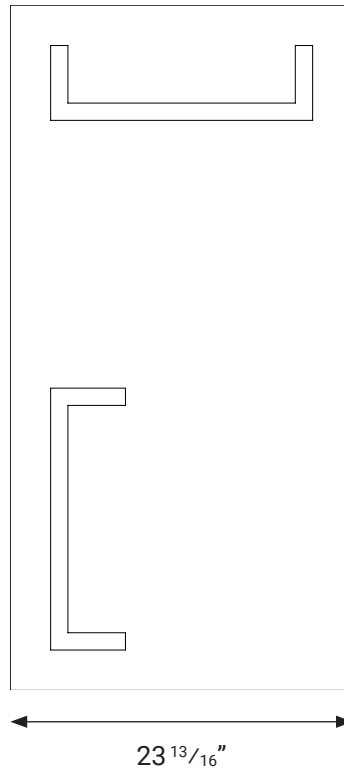


### SIDE VIEW

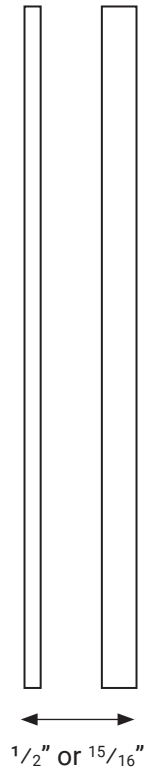

## Ceiling Edit - Code

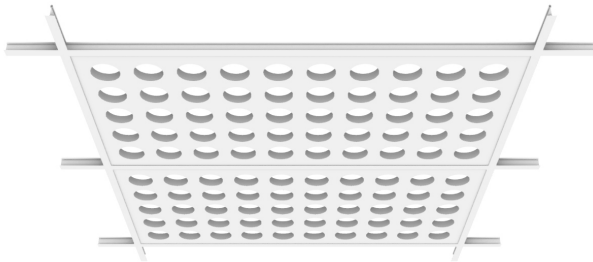

### FRONT VIEW

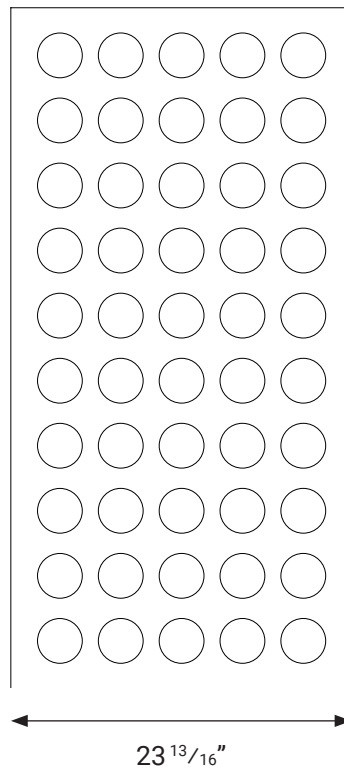

### SIDE VIEW



Product may vary in color due to the nature of the media  
Please refer to website for current color range


**ecoustic**® global leaders  
by INSTYLE in acoustic  
products

# ECOUSTIC® CEILING EDIT PROFILES


## Ceiling Edit - Data



### FRONT VIEW

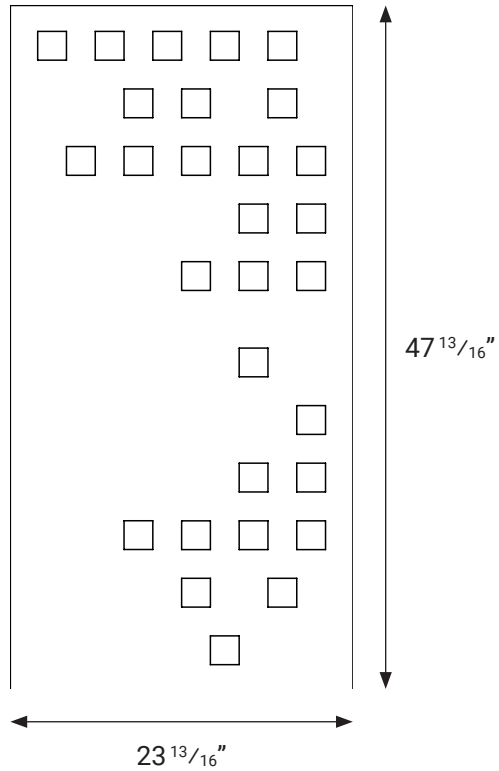


### SIDE VIEW

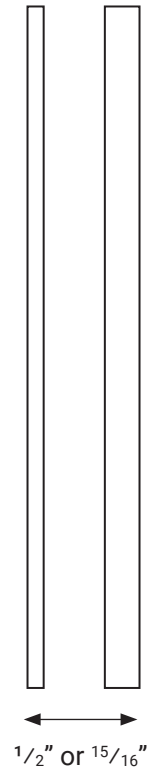


## Ceiling Edit - Dot



### FRONT VIEW

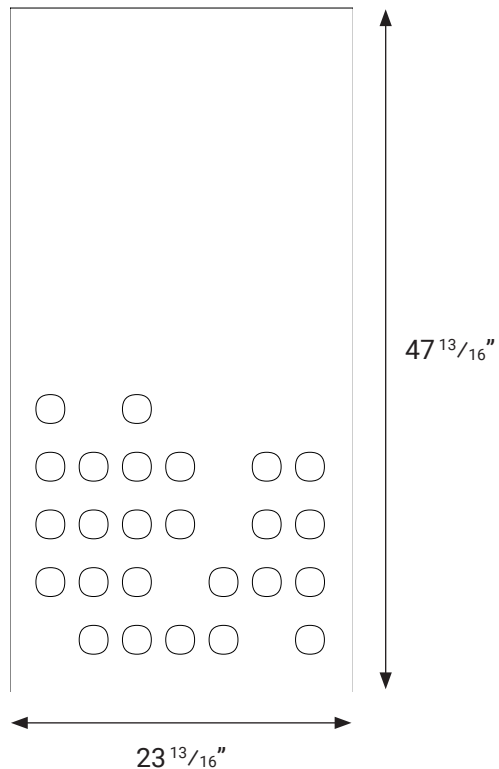

### SIDE VIEW

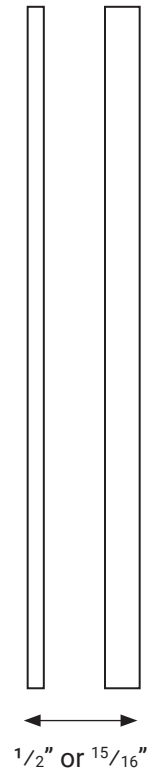

Product may vary in color due to the nature of the media  
Please refer to website for current color range


**ecoustic**® global leaders  
by INSTYLE in acoustic  
products

# ECOUSTIC® CEILING EDIT PROFILES


## Ceiling Edit - Ray



FRONT VIEW

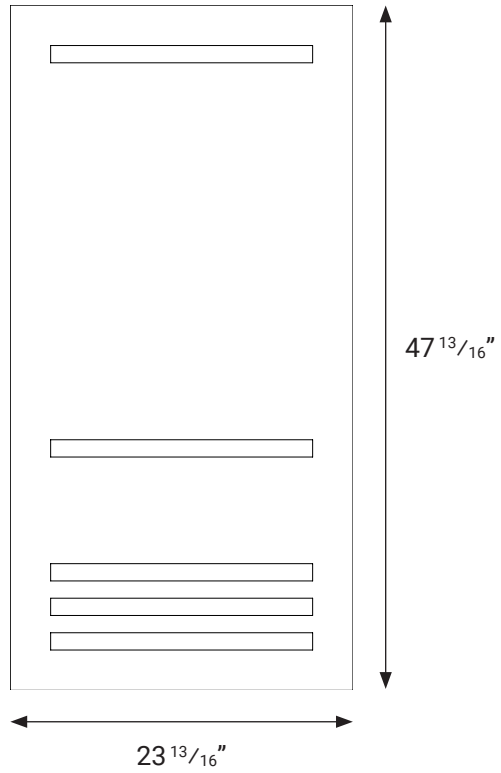


SIDE VIEW

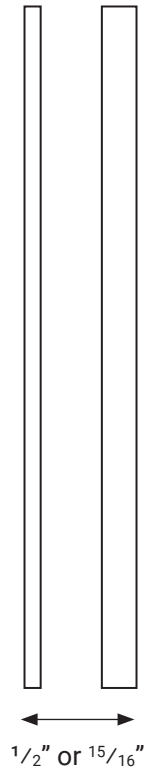


Product may vary in color due to the nature of the media  
Please refer to website for current color range

**ecoustic**® global leaders  
by INSTYLE in acoustic  
products

# ECOUSTIC® CEILING EDIT

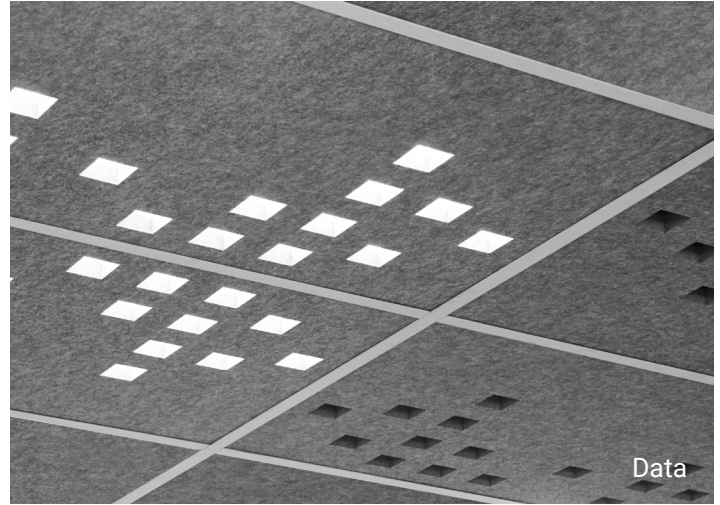

- COMPOSITION** 100% PET
- DIMENSIONS** 47.8" x 23.8" (1215mm x 605mm)
- THICKNESS** .47" or .94" (12mm or 24mm)
- FIRE RATING**  
ASTM E84 Class A for both thicknesses  
AS/ISO 9705
- APPLICATION** Ceiling
- ACOUSTIC**  
.47" Tile NRC 0.85 (8" air gap)  
.94" Tile NRC 0.95 (8" air gap)

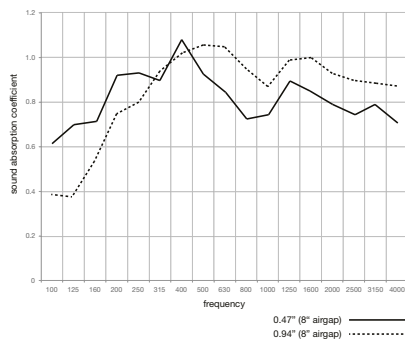

**PLEASE NOTE** It is the responsibility of site installation managers to confirm compatibility between the ceiling grid system specified and the dimensions of Ecoustic® ceiling tiles prior to placement of purchase order. Custom sized Ecoustic® ceiling tiles can be produced, however, conditions do apply. Please contact Unika Vaev customer service or your local sales representative for more information.

**Designed for the Environment:** Easy to disassemble and separate into the appropriate recycling systems, Ceiling Edit tiles can be recycled.

- Cradle to Cradle Bronze Certified®
- Low VOC
- Red List Compliant
- Rapidly Renewable Content
- Prop 65 Compliant
- Published with mindful MATERIALS / Ecomedes
- Health Product Declaration®
- EPD
- Oeko-Tex Certified
- Declare Compliant
- ISO 14001-Certified EMS
- No FR Additives
- No Conflict Minerals

**Building Rating Systems:** Ceiling Flats will contribute the following points for Green Star, LEED + WELL building standards


Criteria	Green Star	LEED	WELL
Low VOC	✓	✓	✓
3rd Party Certification	-	✓	✓
Manufacturer Certified EMS	✓	✓	N/A
Toxic Material Reduction	N/A	N/A	✓
Sound Reducing Surfaces	N/A	N/A	✓



Product may vary in color due to the nature of the media  
Please refer to website for current color range

**ecoustic®** global leaders  
by INSTYLE in acoustic products

# ECOUSTIC® CEILING EDIT

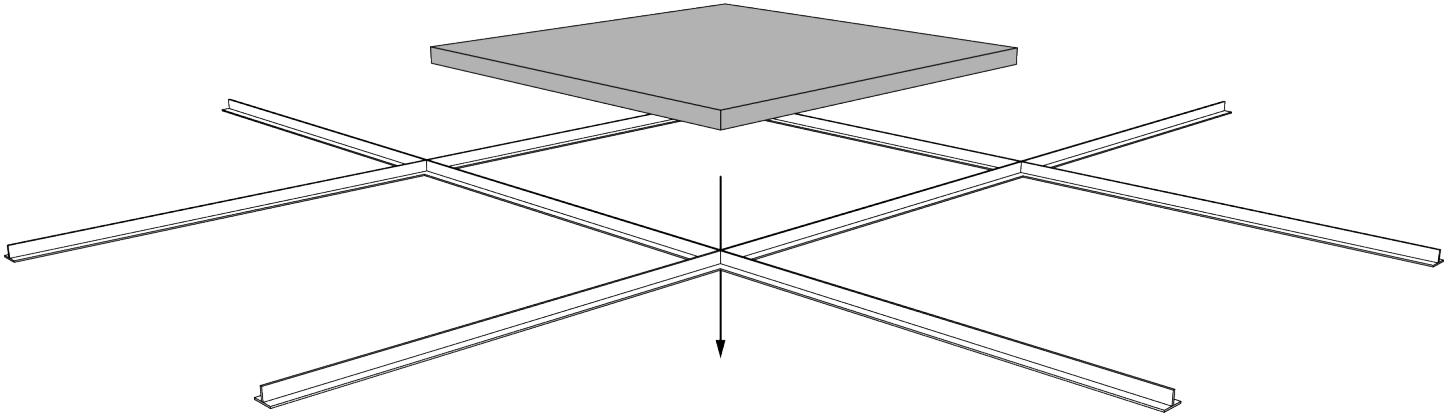

Ecoustic® Ceiling Edit (per box in a single color)  
SC 0.47": (8) Tiles per box  
SC 0.94": (4) Tiles per box

How to Specify	
Design	Angle, Code, Data, Dot, or Ray
Size	47.8" x 23.8" (1215mm x 605mm)
Thickness	0.47" or 0.94" (12mm or 24mm)
Color	17 colors of 0.47" SC 5 colors or 0.94" SC
Acoustic Mesh	Optional black acoustic mesh backing

**HVAC:** Ensure Ecoustic® Edit is compliant with the specified HVAC system. Edit is recommended for Ducted Return Air and is not Plenum Return Air rated.

**Back Loading:** Ecoustic® Edit ceiling tiles are not suitable for back loading. Loads must be supported independently by the grid or through the use of additional fixtures.

**Toxicity:** Polyester is non-toxic and is classed the same as wood under the State of New York Article 15 Part 1120. Edit does not contain any Red List Chemicals (USA EPA).

**Back Lighting:** LED lights can be integrated seamlessly on top of Ecoustic® Edit ceiling tiles.

**Drop Ceiling Specification:** Ecoustic® Edit drop-in ceiling tiles are designed to be compatible with 15mm and 24mm Exposed Tee 1200 grid systems. Ensure the tile is suitable for your selected system prior to ordering.

**Moisture Absorption:** After four days at 50°C, 95% RH the moisture absorbency of SC 12mm was less than 0.3% by weight respectively. As Ecoustic® Edit is 100% polyester, it will not degrade over time due to moisture, mildew or rot in office environments.

**Fixtures:** Any fixtures must be supported independent to the Ecoustic® Edit ceiling tiles. The tiles can be cut on site to accommodate for new and existing lighting and fixtures. When cutting use a new blade for each cut and ensure the area to be cut is fully supported throughout. Cut from the tile face with care.

Product may vary in color due to the nature of the media  
Please refer to website for current color range

**ecoustic®** global leaders  
by INSTYLE in acoustic  
products