

ECOUSTIC SCULPT® INSTALLATION + CARE




unika vaev
INSTYLE

Hear yourself think®

SCULPT® PARALLEL TILE INSTALLATION


These instructions apply to all Sculpt® Parallel designs such as Classic, Cove, Diamond, Fort, Peak, Quadrant, Random, Ridge, Steps, Taper, Tide, & Zig.

Supplied

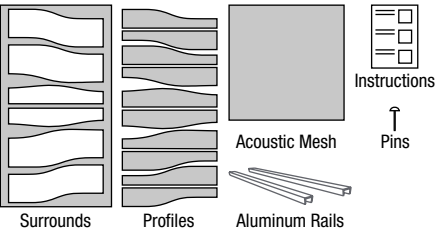


	24 Tile	48 Tile
Tiles	8	4
Acoustic Mesh	8	4
Aluminum Rails	16	8
Pins	32	24


*Please Note: Component qtys above are doubled for Sculpt® Classic Shallow

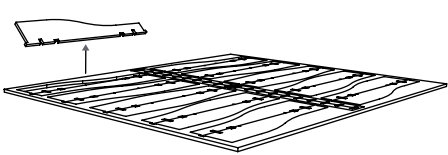


Step 1
Remove the profiles from their protective surrounds.

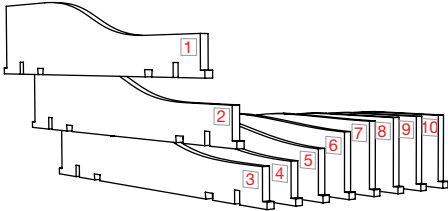


Step 2
Arrange the profiles in sequence using the removable numbers and letters applied to each profile.

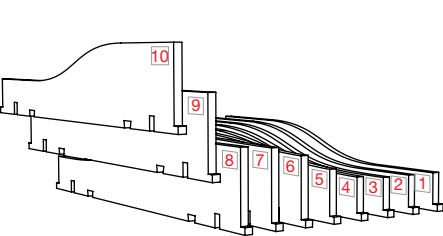


Note
To achieve a mirrored pattern, the order of the sequence must be reversed on tiles as required to achieve desired result. Refer to the Reflected Ceiling Plan.

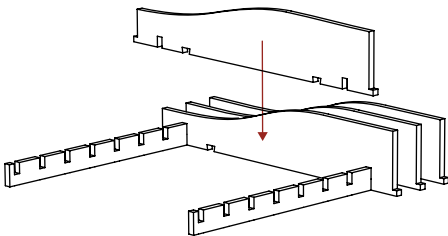



Step 3
Push the profiles into the two combs

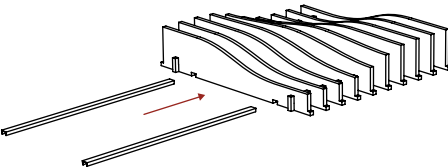


Step 4
Slide the two aluminum rails through all profiles using the slots provided. Remove labels.

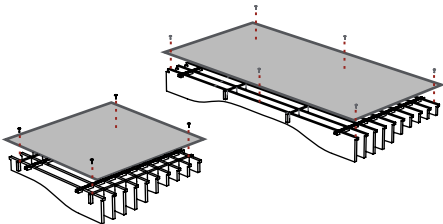

Step 5
Turn assembly over and attach the acoustic mesh to the back of the tile using the pins provided. Note: Pins should be placed close to midpoints and corners.

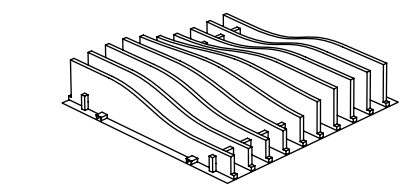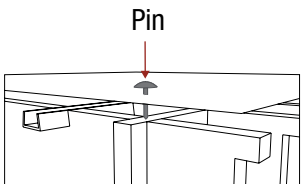

The assembled ceiling tile is complete.




Ceiling Grid Installation
Tile edge notch and tab profiles are designed to capture either 9/16" (15mm) or 15/16" (24mm) ceiling grid profiles. Tiles can be fitted and removed from ceiling grids quickly to access services above.

SCULPT® NETWORK INSTALLATION


Supplied

24 Tile / 48 Tile

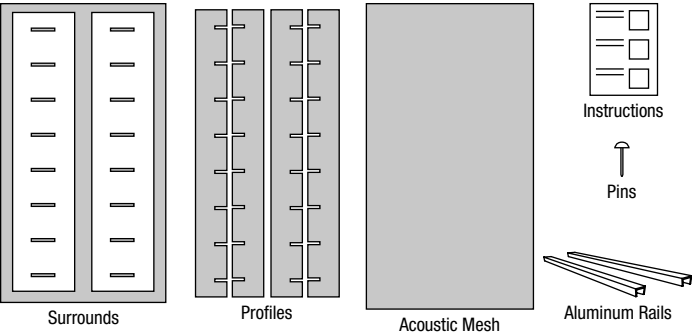


Tiles
Acoustic Mesh
Aluminum Rails
Pins


Network Shallow		Network Deep	
24 Tile	48 Tile	24 Tile	48 Tile
16	8	8	4
16	8	8	4
32	16	16	8
64	48	32	24

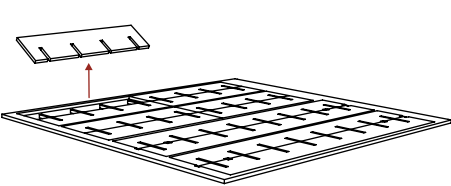


Step 1
Remove the profiles from their protective surrounds.

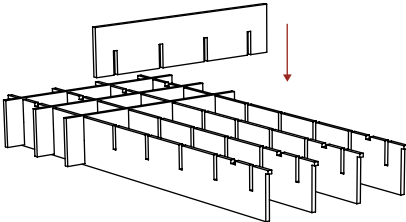



Step 2
Push the shorter profiles into the longer profiles.

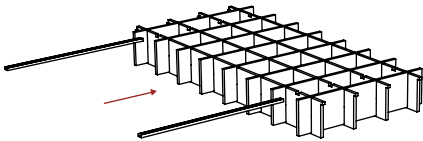


Step 3
Slide the two aluminium rails through all 4 longer profiles using the slots provided. Remove labels.

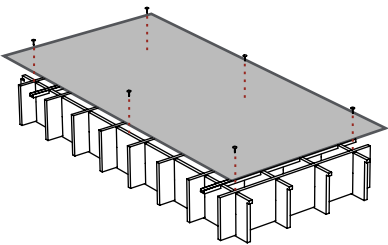

Step 5
Turn assembly over and attach the acoustic mesh to the back of the tile using the pins provided. Note: Pins should be placed close to midpoints and corners.

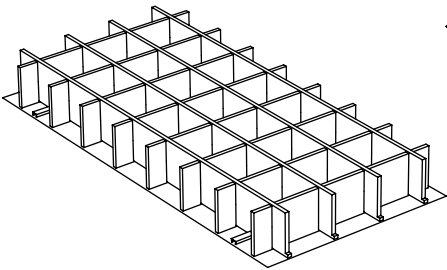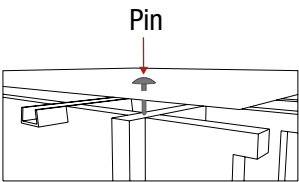

The assembled ceiling tile is complete.


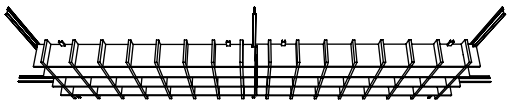


Ceiling Grid Installation
Tile edge notch and tab profiles are designed to capture either $\frac{9}{16}$ " (15mm) or $\frac{15}{16}$ " (24mm) ceiling grid profiles. Tiles can be fitted and removed from ceiling grids quickly to access services above.

SCULPT® ICON INSTALLATION


Supplied

48 Tile

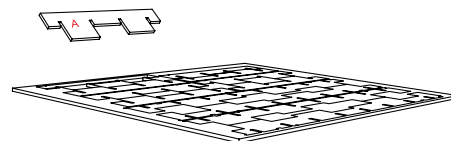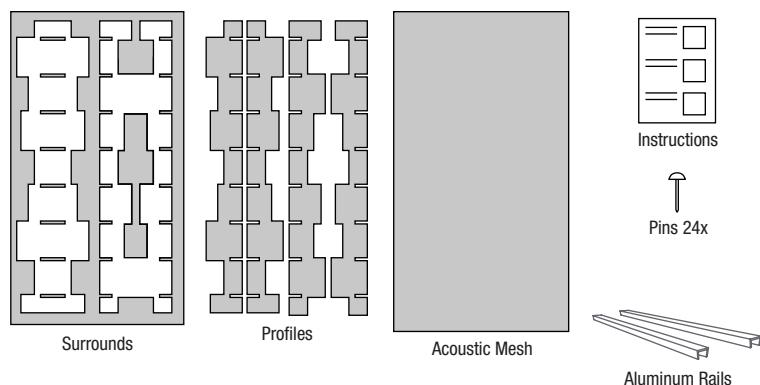


Step 1

Remove the profiles from their protective surrounds.

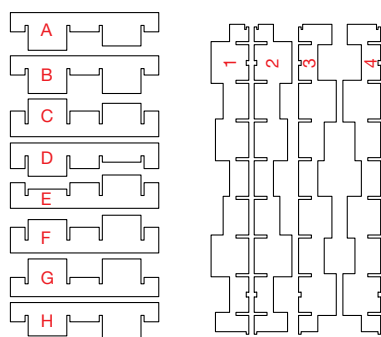


Step 2

Arrange profiles in sequence using the numbers + letters applied to each profile before pushing the 8 shorter profiles into the 4 longer profiles. Start with profile A and profile 1 on the same corner.

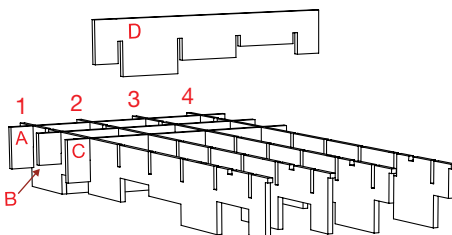


Step 3

Reference numbers + letters 1, 3, B, E + H will be displayed on reverse face of the assembled profile, compared with other profiles.

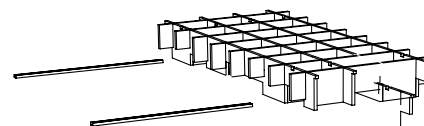



Step 4

Slide the two aluminium rails through the four longer profiles using the slots provided. Remove labels.

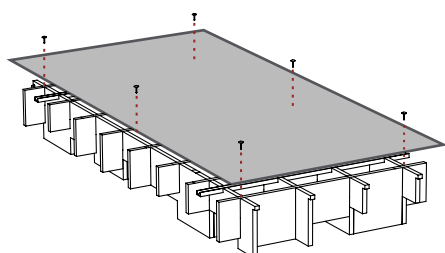


Step 5

Attach the acoustic mesh to the back of the tile using the pins provided. Note: Pins should be placed close to midpoints and corners.

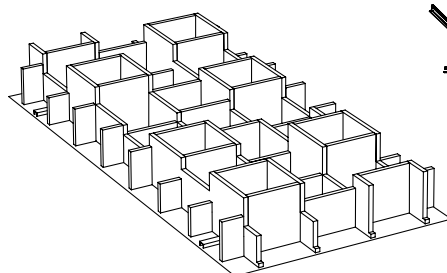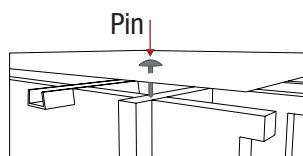

The assembled ceiling tile is complete.





Ceiling Grid Installation

Tile edge notch and tab profiles are designed to capture either $\frac{9}{16}$ " (15mm) or $\frac{15}{16}$ " (24mm) ceiling grid profiles. Tiles can be fitted and removed from ceiling grids quickly to access services above.

SCULPT® MOD INSTALLATION


Supplied

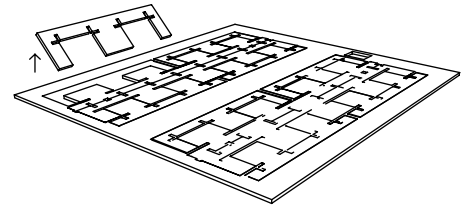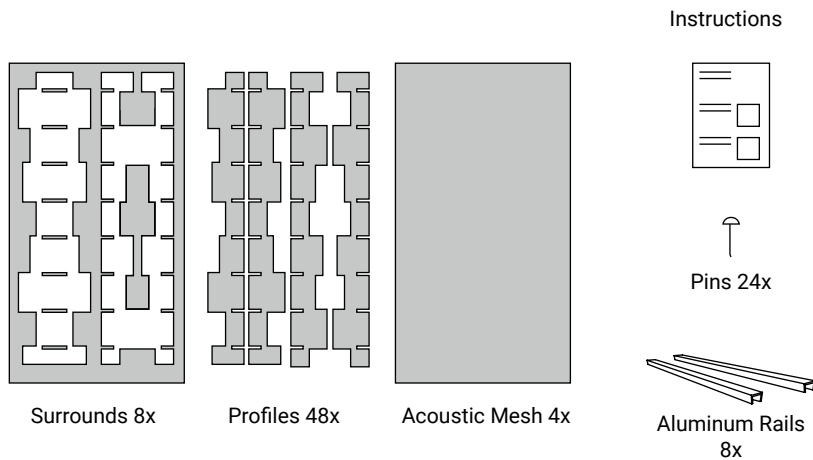

Step 1

Remove profiles from their protective surround.

Please note there are 2 x large profile shapes, and 2 x small profile shapes

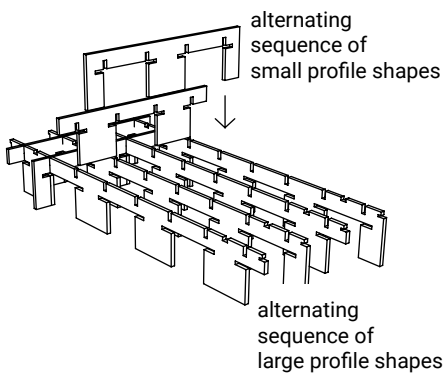


Step 2

Push the 8 smaller profiles into the four longer profiles, in alternating sequence of the large and small profile shapes.



Step 3

Slide the two metal rails through all 4 large profiles using the slots provided.

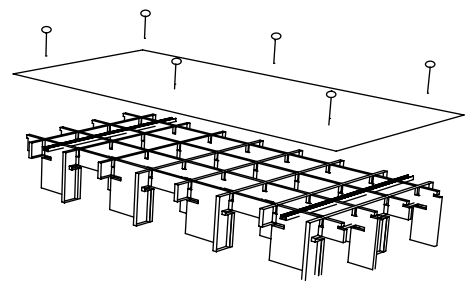

Step 4

Turn assembly over and attach the acoustic mesh to the back of the tile using the pins provided. (NOTE: Each pin should be placed at the intersection of two profiles).

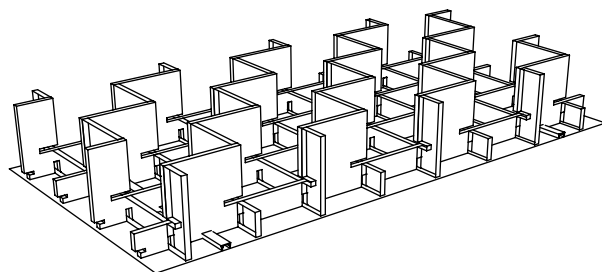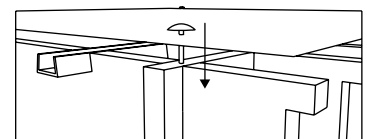


The assembled ceiling tile is complete.

SCULPT® ANGLE INSTALLATION


STEP 1

On a clean flat surface remove components from the protective surrounds. Ensure to group the similar items together. Identify which are the combs and profiles.

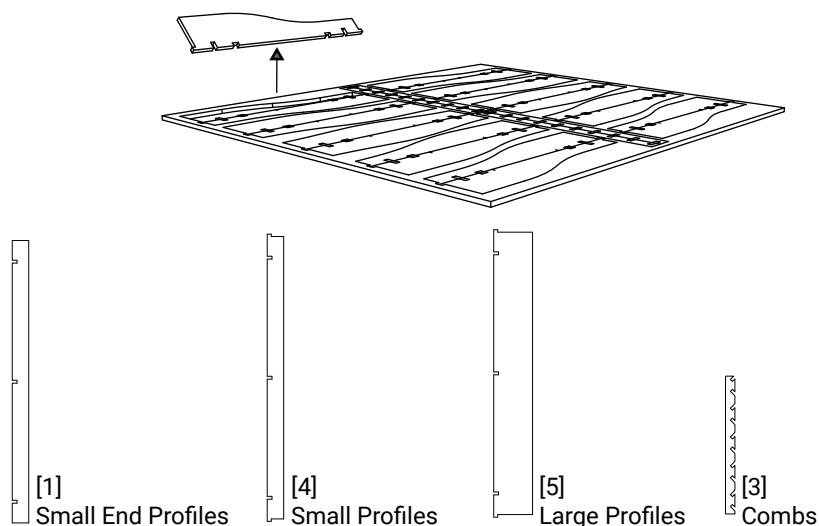


STEP 2

Insert a small profile into the combs at 45 degrees. Ensure a firm tight fit.

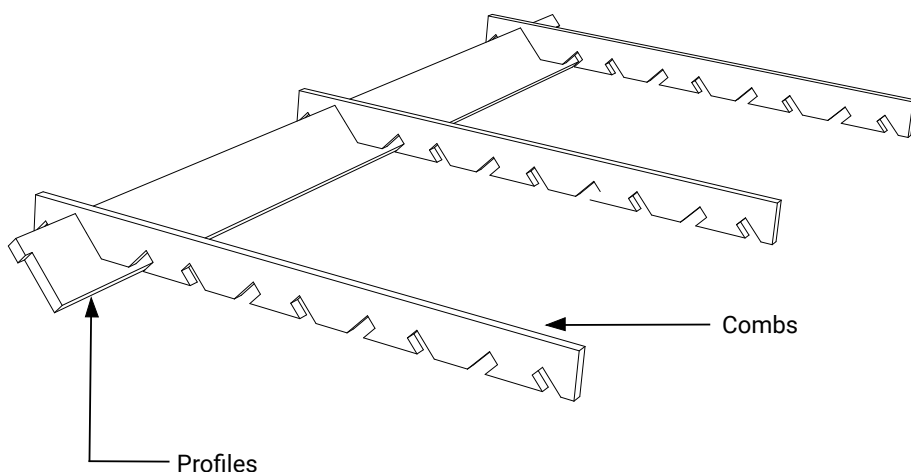

STEP 3


Insert the remaining small profiles into the combs shown. Leave insertion of the end profile until after the tile has been installed into the ceiling grid.

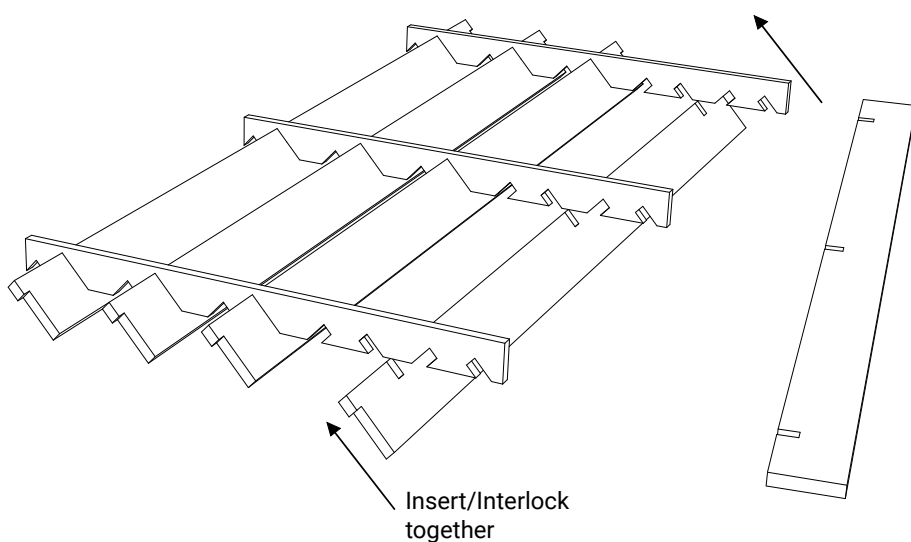

SCULPT® ANGLE INSTALLATION


STEP 4

Complete the rest of the tile by inserting the large profiles into the assembly at a mirrored position to the smaller profiles already inserted into the combs.

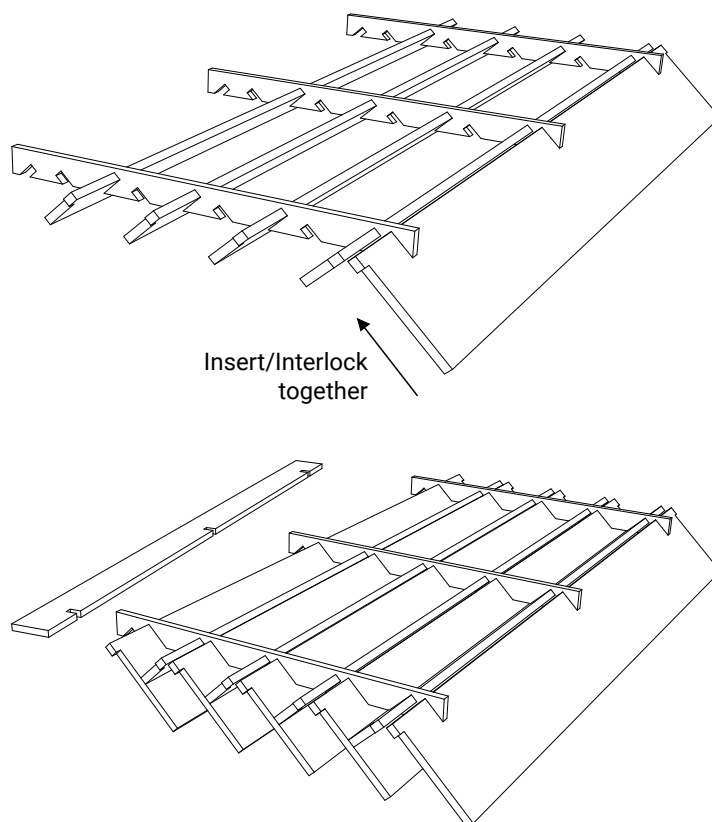

STEP 5


Maneuver the tile above the ceiling grid and gently lower the tile until the profile tabs are resting on the grid.

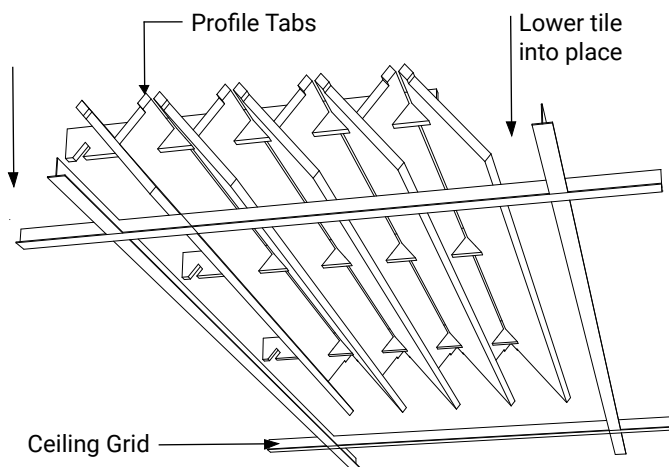


STEP 6

Insert the remaining small profile in place.


The tile is now complete.

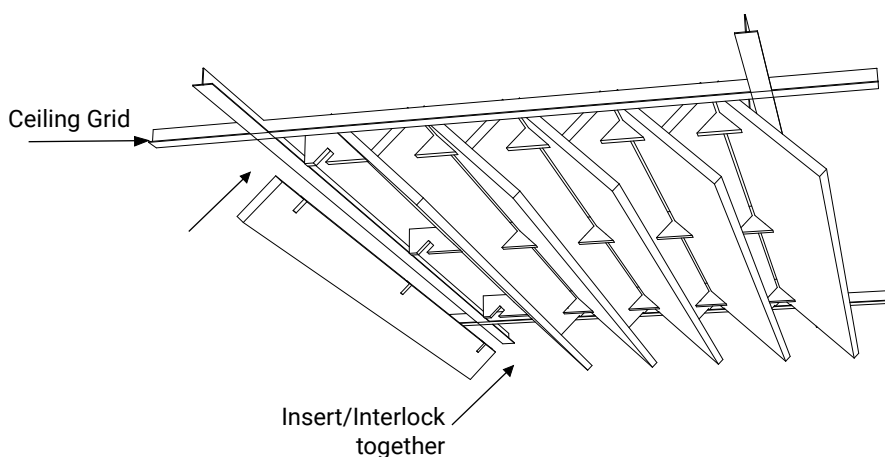

SCULPT® ANGLE INSTALLATION

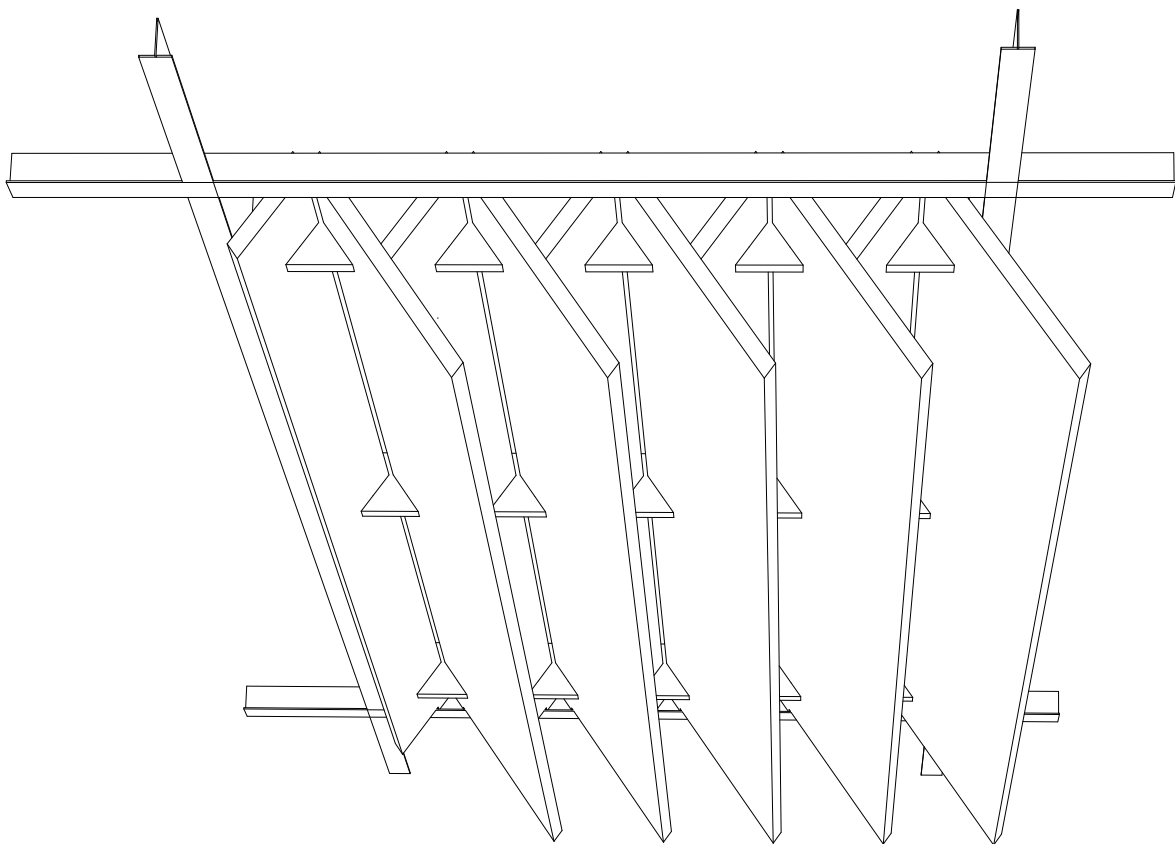

Bottom perspective view of Sculpt® Angle in ceiling grid

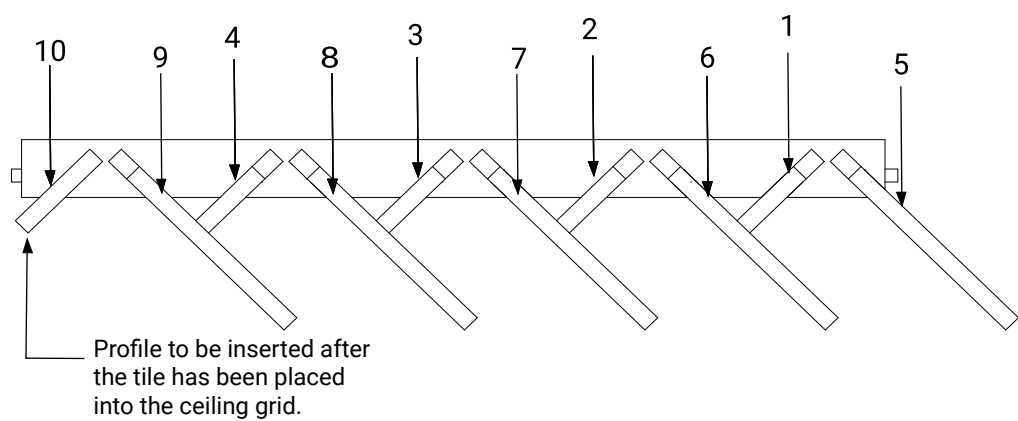

Order of profile installation

ECOUSTIC SCULPT® CARE

Regular Care

- Protect from direct heat and sunlight
- To prevent dust build up, lightly dust with a soft cloth or vacuum with a soft brush attachment

Cleaning

- Professional cleaning is always recommended
- Always test any cleaning products on an inconspicuous area prior to commencing cleaning
- Blot any excess spills from the material with a dry clean sponge or cloth
- Treat all stains and spills as soon as possible
- Most marks can be spot cleaned by lightly wetting the affected area with a mild detergent and warm water solution
- Do not saturate the tile
- Do not scrub or abrade the surface as this will affect the surface finish
- Once the stain or mark has been loosened then blot the excess solution out with a dry clean sponge or cloth
- Sponge afterwards with clean warm water and dry any excess moisture with a dry clean sponge or cloth
- The product can also be spot cleaned with dry cleaning fluid, lightly sponge a small amount of dry cleaning fluid and blot
- Dry away from direct heat and sunlight
- Do not use carpet shampoo